Vintron
.....the name you trust

32" DIGITAL PODIUM

Capacitive Touch Screen Podium with Windows OS



32" CAPACITIVE TOUCH
Interactive presentation control

2K RESOLUTION
2560 x 1440 display output

WINDOWS OS
windows 10/11 Pro compatible

DUAL GOOSENECK MICROPHONE
Cardioid pickup for presentation use

PERFECT FOR


CLASSROOMS & LECTURE HALLS


CONFERENCE & MEETING ROOMS


TRAINING & SEMINAR ROOMS


GOVERNMENT & PUBLIC SECTOR

MAKE IN INDIA

www.vintronsmartvision.com

Vintron
.....the name you trust

MAKE IN INDIA

DIGITAL PODIUM

32” CAPACITIVE

Touch Screen Podium with Windows OS



2K Display
2560 x 1440 resolution

Intel Core i5
Integrated intel UHD graphics

10-Point Touch
Capacitive multi-touch

Multiple I/o
USB, HDMI, VGA, LAN, Audio

Windows 10/11 Pro
Pre-installed Compatible OS

Dual Microphones
Gooseneck cardioid microphone

OVERVIEW

The Vintron 32" Digital Podium combines a large capacitive touch interface, Windows computing, flexible I/O, integrated audio and dual gooseneck microphones in a sleek presentation platform. It is designed for engaging presentations, training sessions and multimedia content management.

- Classrooms & Lecture Halls
- Training & Seminar Rooms
- Educational Institutions
- Exhibition & Event Spaces
- Conference & Mteeting Rooms
- Corporate Presentations
- Government & Public Sector

CONNECTIVITY & WORKING PRINCIPLE

Display & System

Screen Size	32 Inch
Touch Technology	Capacitive Multi-Touch (10 Point)
Resolution	2K (2560 x 1440)
Aspect Ratio	16:9
Brightness	350 cd/m²
Contrast Ratio	1200:1
Viewing Angle	178° (H)/178° (V)
Surface	Anti-glare, 7H Tempered Glass
Operating System	Windows 10/11 Pro
Processor	Intel® Core™ i5
Memory	8GB/16GB DDR4 (Optional)
Storage	256GB/512GB SSD (Optional)
Graphics	Integrated Intel® UHD Graphics
Audio	High Definition Audio
Network	LAN, Wi-Fi, Bluetooth (Optional)

I/O, MICROPHONE & PHYSICAL

USB Ports	4 x USB 3.0, 2 x USB 2.0
HDMI Output	1 x HDMI
VGA Output	1 x VGA
Audio	1 x Mic In, 1 x Line Out
LAN	1 x RJ45
Power Input	AC 100-240V, 50/60Hz
Microphone Type	Dual Gooseneck Microphone
Pickup Pattern	Cardioid
Frequency Response	50Hz - 16kHz
Sensitivity	-45dB ± 3dB
Podium Material	Metal Body with Powder Coating
Color	Black (Customizable)
Dimensions	650 x 500 x 1100 mm (Approx.)
Net Weight	45-50 Kg (Approx.)
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 60°C
Humidity	10% to 90% (Non-condensing)

MAKE IN INDIA

Vintron
.....the name you trust


DIMENSIONS & ENVIRONMENT

Approx. Dimensions	650 mm (W) x 500 mm (D) x 1100 mm (H)	**Storage Temperature**	-10°C to 60°C
Weight	45 - 50 Kg (Approx.)	**Humidity**	10% to 90% RH
Operating Temperature	0°C to 40°C		

Specifications are based on the supplied product datasheet image. Optional configurations may vary.

DIGITAL PODIUM APPLICATION DIAGRAM

PRESENTATION & CONTROL

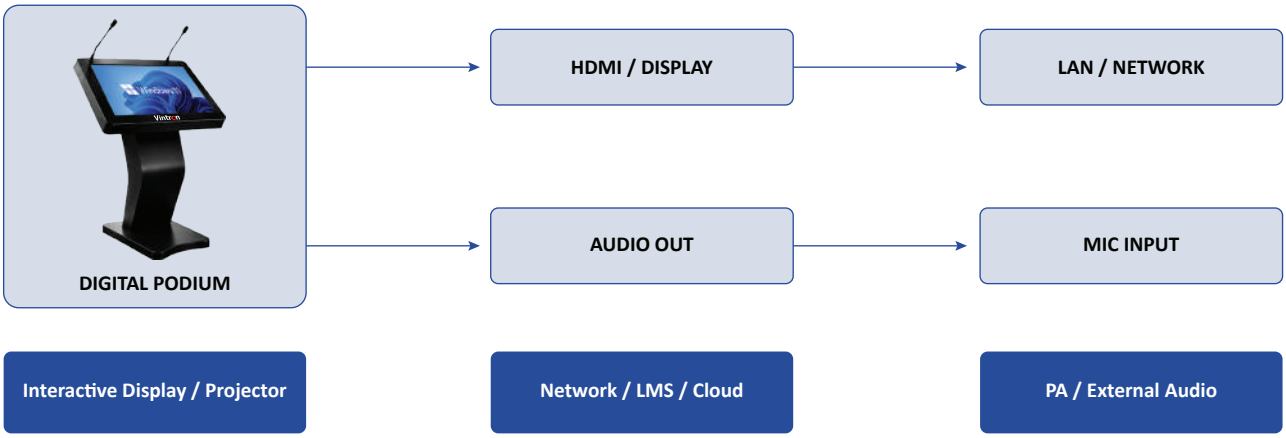

HOW IT WORKS

- Presenter operates the 32" capacitive touch interface.
- Windows-based applications support presentations and multimedia. HDMI/VGA can connect to an external display or projector.
- LAN enables network connectivity for approved applications and services. Dual gooseneck microphones provide local voice input.
- Audio output can integrate with external room sound systems.

APPLICATION AREAS

- Classrooms & Lecture Halls
- Conference & Meeting Rooms
- Training & Seminar Rooms
- Corporate Presentations
- Educational Institutions
- Government & Public Sector
- Exhibition & Event Spaces

Vintron

.....the name you trust



OUR PRODUCTS



VINTRON SMARTVISION PRIVATE LIMITED.

Corporate Office: D-138, Okhla Industrial Area Phase-1, New Delhi-110020, India.

lead@vintronsmartvision.com | marketing@vintronsmartvision.com

www.vintronsmartvision.com

TOLL FREE: 1800 121 4322

MAKE IN INDIA