


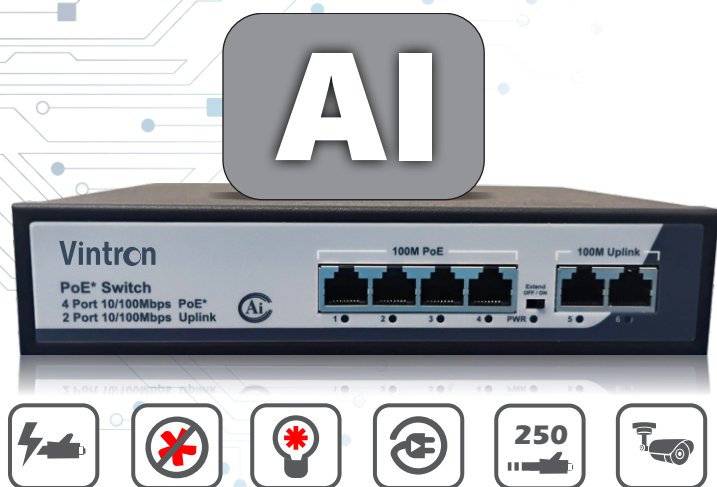

VS-POE-42065 ULTRA

1-4 Port: 250m Distance PoE Switch

Main Feature:

- 4*10/100Mbps PoE ports, 2*10/100Mbps uplink port;
- Support IEEE802.3af/at;
- Support restrain network storm.
- Max Transmission distance up to 250m with PoE Power;
- Built-in power supply;
- Maximum power of single PoE port: 30W;
- Maximum PoE power: 65W;
- Adopts store-and-forward architecture;
- Fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall;
- Support lightning protection 2KV;

Feature	Specification
Power Adapter Voltage	AC 110V-240V
Consumption	65W(52V 1.25A)
PoE Ethernet Port	1-4 port:10/100Mbps
Ethernet Port	Uplink port:10/100Mbps
Transmission Distance	100Mbps:0-100m / 10Mbps:0-250m / Uplink Port:0-100m
Transmission Medium	Cat5/5e/6 standard network cable
Network Standard	IEEE802.3/802.3u,IEEE802.3x,IEEE802.3ab
Switching Capacity	1.2Gbps
Packet Buffer Memory	1Mbits
Throughput	0.8928Mbps
MAC Table	1K
Packet Forwarding rate	10Mbps:14880pps/port, 100Mbps:1488000pps/port
PoE Standard	IEEE802.3af/at
PoE Power Supply	1/2 + ,3/6- ;4 core power supply
PoE Power	af=15.4W,at=30W for each port
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and back pressure for Half-duplex mode
LED Indicator	LINK/ACT 100Mbps; Green LED , PoE Status Indicator; No , Power Indicator; Red LED , Extender: Green LED
Working temperature	0°C~55°C
Relative Humidity	20-95%
Storage temperature	-20°C~70°C
Dimension(L*W*H)	190mm*125mm*38mm
Color & Weight	Black 0.81Kg



*Product casing and specifications are subject to change without prior notice..



1800 121 4322



www.vintronsmartvision.com

